

Up to 2000kg

T-end (adj.)

Load Cell Mounting Feet

FEATURES

- Adjustable height or fixed height version
- Designed to work with T-end version shear beams
- Low profile
- Stainless steel
- Anti-vibration
- Easy installation




DESCRIPTION

T-End mounting feet are ideal for platform use where a number of load cells are used together. The stainless steel construction with the inert rubber foot makes the assembly impervious to most industrial chemicals and ideal for harsh environments. A food grade rubber option is also available.

They must be used with the appropriate load cells, which are current matched and specially machined to accept T-End accessories. It is recommended to order load cells and T-End mounting feet together.

OUTLINE DIMENSIONS in millimeters

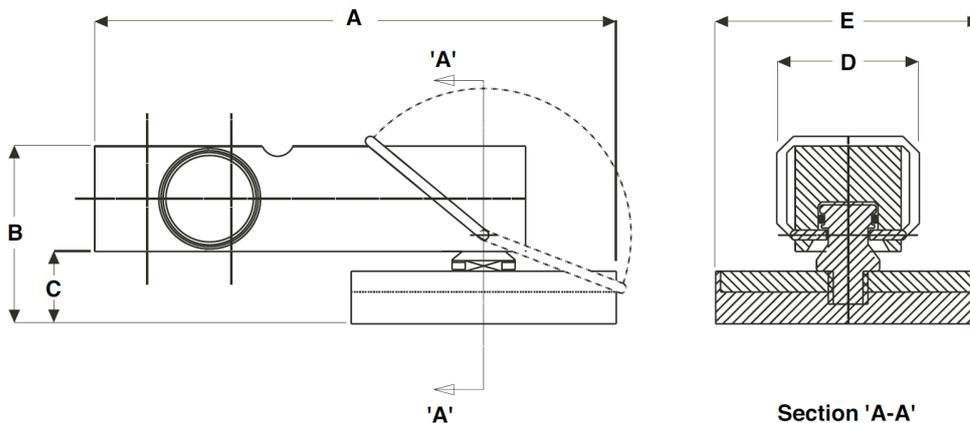

Note:

1. All dimensions in mm
2. A mounting foot adapter is available which increases the heights 'B' & 'C' by 7mm (for standard shear beams)

Load Cell Type		3410			3510	
Capacity		250-4000 lbs	500-1000 kg	2000 kg	300-2000 kg	5000 kg
Both T-foot versions	A	157.4	157.4	157.4	157.4	202.4
	D	43	43	43	43	57
	ØE	80	80	80	80	100
Fixed height foot	B	52	52	58	54	77.5
	C	22	22	22	22	29.5
Adjustable height foot	B low	58	58	64	60	-
	B high	70	70	76	72	-
	C low	28	28	28	28	-
	C high	40	40	40	40	-